



### OVERVIEW

The PoE Large IP Display (IPCSL-RWB) works well for auditoriums, gyms, multi-purpose spaces, and large rooms.

#### AUDIO



8" high-efficiency speaker  
Audio coverage up to  
600 ft<sup>2</sup>

#### MICROPHONE



Hands-free talk back  
Monitoring

#### FLASHERS



One red, one white, one blue  
Individually controlled

#### DISPLAY



Viewable up to 150 ft  
1-line or 2-line display  
Multi-color scrolling text  
and pixel graphics

#### ANALOG INTEGRATION



Connect strobes, motion  
sensors, electronic locks,  
call buttons, etc.

#### SOFTWARE



Diagnostic software included  
Compatible with third-party  
software, including InformaCast,  
Revolution, and Cisco CallManager

#### SIP INTEGRATION



SIP-enabled  
Easily interfaces with  
VoIP/SIP phone systems

#### LIGHT SENSOR



Auto-dimming display

### SOLUTIONS

- Paging
- Intercom
- Bell scheduling
- Code alerts
- Emergency notification
- Access control
- Security monitoring
- Sound masking
- Music streaming

### ADDITIONAL FEATURES

- Built-in web server
- Full multicast and broadcast support
- Requires Cat5 or Cat6 cable
- Atomic time
- Peripheral Interface Adapter Board provides (sold separately):
  - Audio line in
  - Audio line out
  - 2 general purpose inputs
  - 1 general purpose output relay

### COMPATIBLE PERIPHERALS

**Strobe Kit**  
AND-STROBE-KIT-1

**Call Button Kit**  
AND-BTN-KIT-1

**Peripheral Interface Adapter Board**  
AND-PIA-2

## SOFTWARE

The IPCSL-RWB integrates easily with third-party mass notification software, as well as SIP and VoIP phone systems, enabling a facility to take advantage of all the device capabilities. The device also comes with diagnostic software (compatible to run alongside third-party software), and an on-board web server interface, both which provide the ability to monitor and troubleshoot the ANetD devices on the network.

### Third-Party Software

- InformaCast (Singlewire)
- Revolution (Syn-Apps)
- IPSession (IPCelerate)
- MessageNet Systems
- BellComander (Acro Vista)
- And more!

### VoIP Phone Systems


- Cisco CallManager
- Mitel
- Avaya
- 3CX
- Polycom
- And more!

### IPClockWise


- Diagnostic tool included with device purchase
- Complements investment in third-party software
- Developed and supported by Advanced Network Devices

## DIMENSIONS


Top

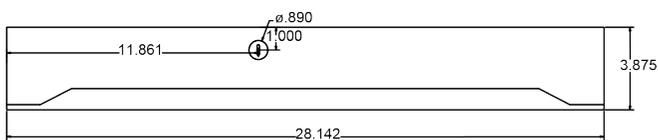


Front

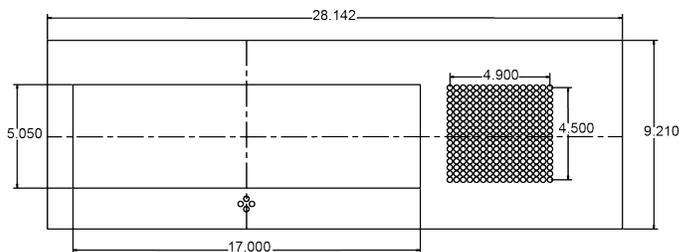

Back

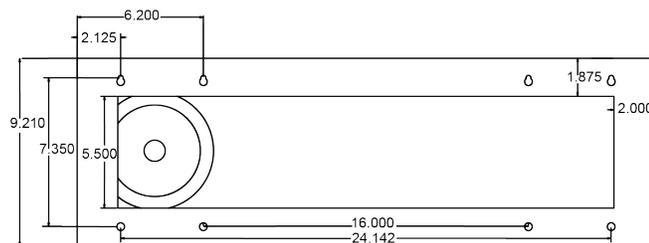

Side



## SPECIFICATIONS

## IPCSL-RWB

ETHERNET I/F	10/100 Mbps
AUDIO POWER	8 W / 16 W
SPEAKER SIZE	8"
AVERAGE SENSITIVITY	95dB, 1W /1M
FREQUENCY RESPONSE	60 Hz - 17 kHz
AUDIO PAYLOAD TYPES	G711, A-law and $\mu$ -law
POWER INPUT	PoE (IEEE802.3af) 15.4 W or PoE+ (IEEE802.3at) 30.0 W
SUPPORTED PROTOCOLS	SIP, IPv4, IPv6, 802.1X, HTTP, SLP, TFTP, NTP, SNMPV1 & SNMPV2c, DHCP, IGMP, ICMP, TCP/IP, LLDP-MED, UDP, MDNS & MDNS-SD
OPERATING TEMPERATURE	-10° TO 50° C (14° TO 122° F)
DIMENSIONS	28.14" W x 9.2" H x 3.88" D
WEIGHT	15 lbs (6.8 kg)
WARRANTY	2 Year Limited

*Due to continual product development, specifications are subject to change without notice.*



Advanced Network Devices | 3820 N. Ventura Dr. Arlington Hts. IL 60004  
847-463-2236 | sales@anetd.com | www.anetd.com



Model: IPCSL-RWB  
Advanced Network Devices  
www.anetd.com  
Conforms to UL STD 60950-1  
Cert. to CAN/CSA STD C22.2 #60950-1  
Tested to IEC 62471  
42.5V 57.0W DC 25.5 W Max  
802.3at PoE+