

Outdoor Auxiliary RGB (Multi-Color) Strobe Kit

CyberData

The IP Endpoint Company

Now up to 38% brighter and upgraded to an IP66 rating, the Outdoor Auxiliary RGB (Multi-Color) Strobe Kit operates as a powerful and highly effective visual alerting device.

This cost-effective, user-installable option can enhance the notification capabilities of the latest line of CyberData VoIP products. The Strobe Kit comes with a 3 meter (9.8 ft) cable that enables the user to connect to a supported CyberData IP endpoint. Power and signaling for the Strobe also comes from the attached CyberData endpoint.

Setup of the Strobe's blink rates and brightness are configured through the web interface of the attached CyberData IP endpoint.

Features

- Meets ADA requirements for telephony signaling and notification
- Compatible with CyberData InformaCast enabled devices
- When connected to a CyberData IP Endpoint, this device supports:
 - Multicast activation
 - For each activation, the user may choose multiple colors, blink rates, and brightness levels
 - Mailbox "message waiting" indication
 - HTTPS or HTTP web based configuration from the IP endpoint. HTTPS is enabled by default.
 - HTTP Command Interface

Use areas include:

- Shipping and receiving areas
- Building exteriors
- Parking garages and parking lots
- Socially Distanced Outdoor Gathering Areas
- Outdoor school amphitheaters, stadiums and playgrounds
- Anyplace needing an IP rated outdoor visual alert




Specifications

Power Input	Supplied by the supported CyberData VoIP endpoint
Flash rate	5 user-defined scenes
LED MTBF	100,000 Hours
Brightness	366 Lux (white color)
IP Rating	IP66
Operating Range	Temperature: -40° C to 55° C (-40° F to 131° F) Humidity: 5-95%, non-condensing
Storage Temperature	-40° C to 70° C (-40° F to 158° F)
Storage Altitude	Up to 15,000 ft. (4573 m)
Dimensions*	5.1 inches [129.5 mm] Length 2.9 inches [73.66 mm] Width 5.1 inches [129.5 mm] Height
Weight	2.0 lbs [0.90 kg]
Boxed Weight	3.0 lbs [1.35 kg]
Compliance	CE; EMC Directive – Class A EN 55032 & EN 55024, LV Safety Directive –EN 60950-1 and EN 62368-1, RoHS Compliant, FCC;Part 15 Class A, Industry Canada; ICES-3 Class A, IEEE 802.3 Compliant; TAA Complaint
Warranty	2 Years Limited
Part Number	011490


*Dimensions are measured from the perspective of the product being upright with the front of the product facing you.

Outdoor Auxiliary RGB (Multi-Color) Strobe Kit

Connection Example

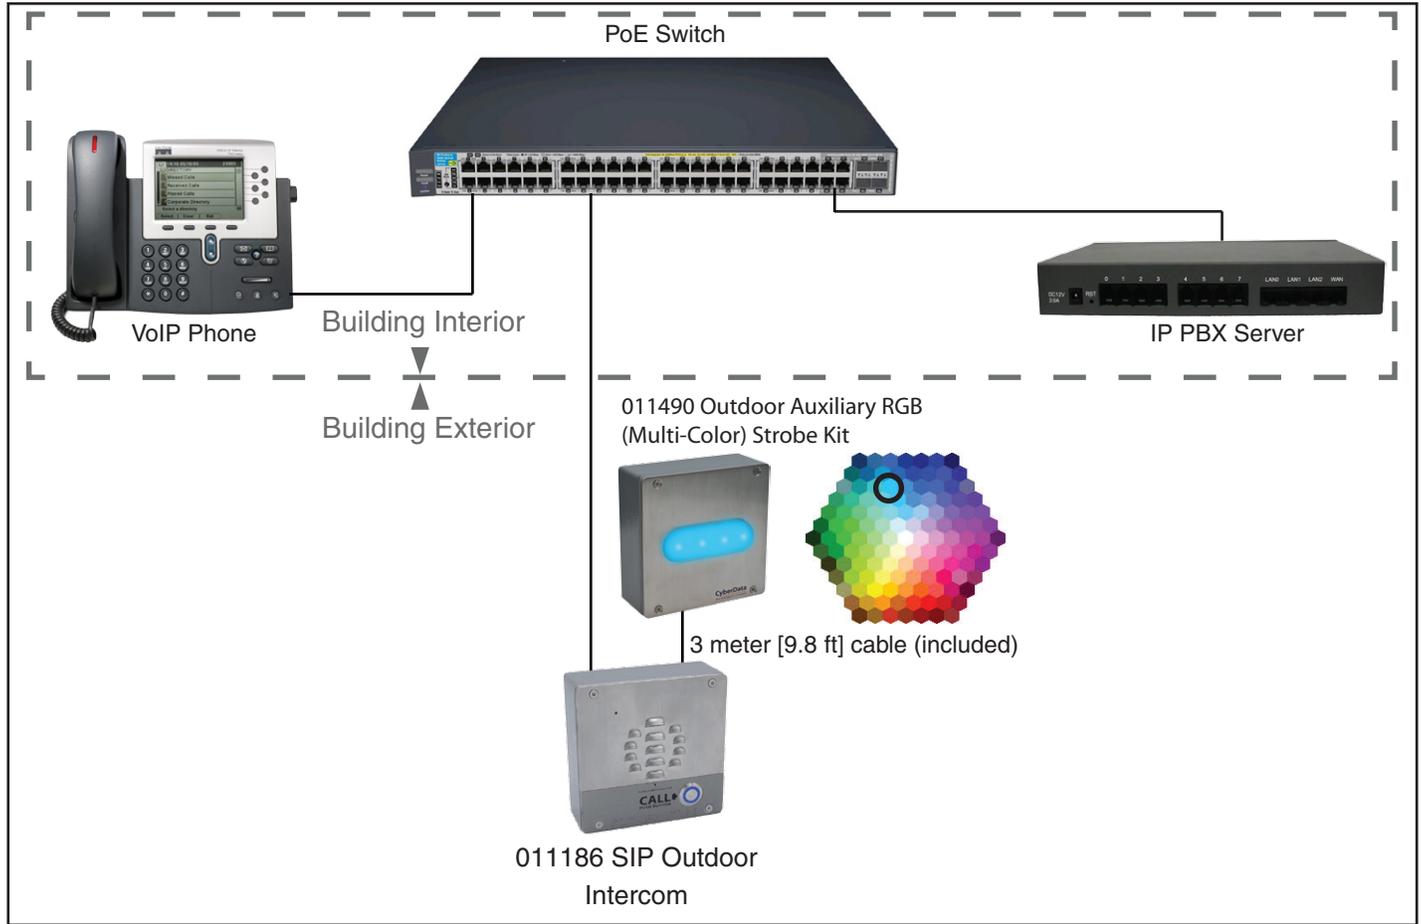


Dimensions

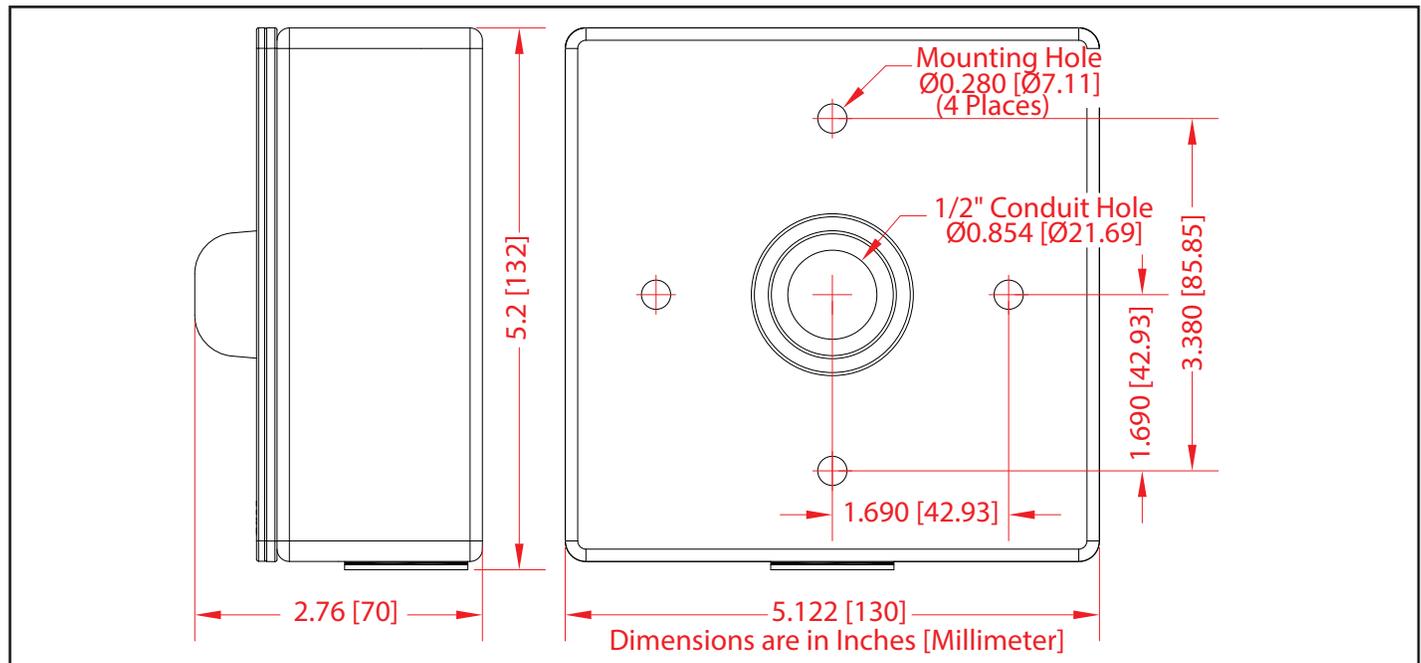

Outdoor Auxiliary RGB (Multi-Color) Strobe Kit

Optional Conduit Wall Mounting

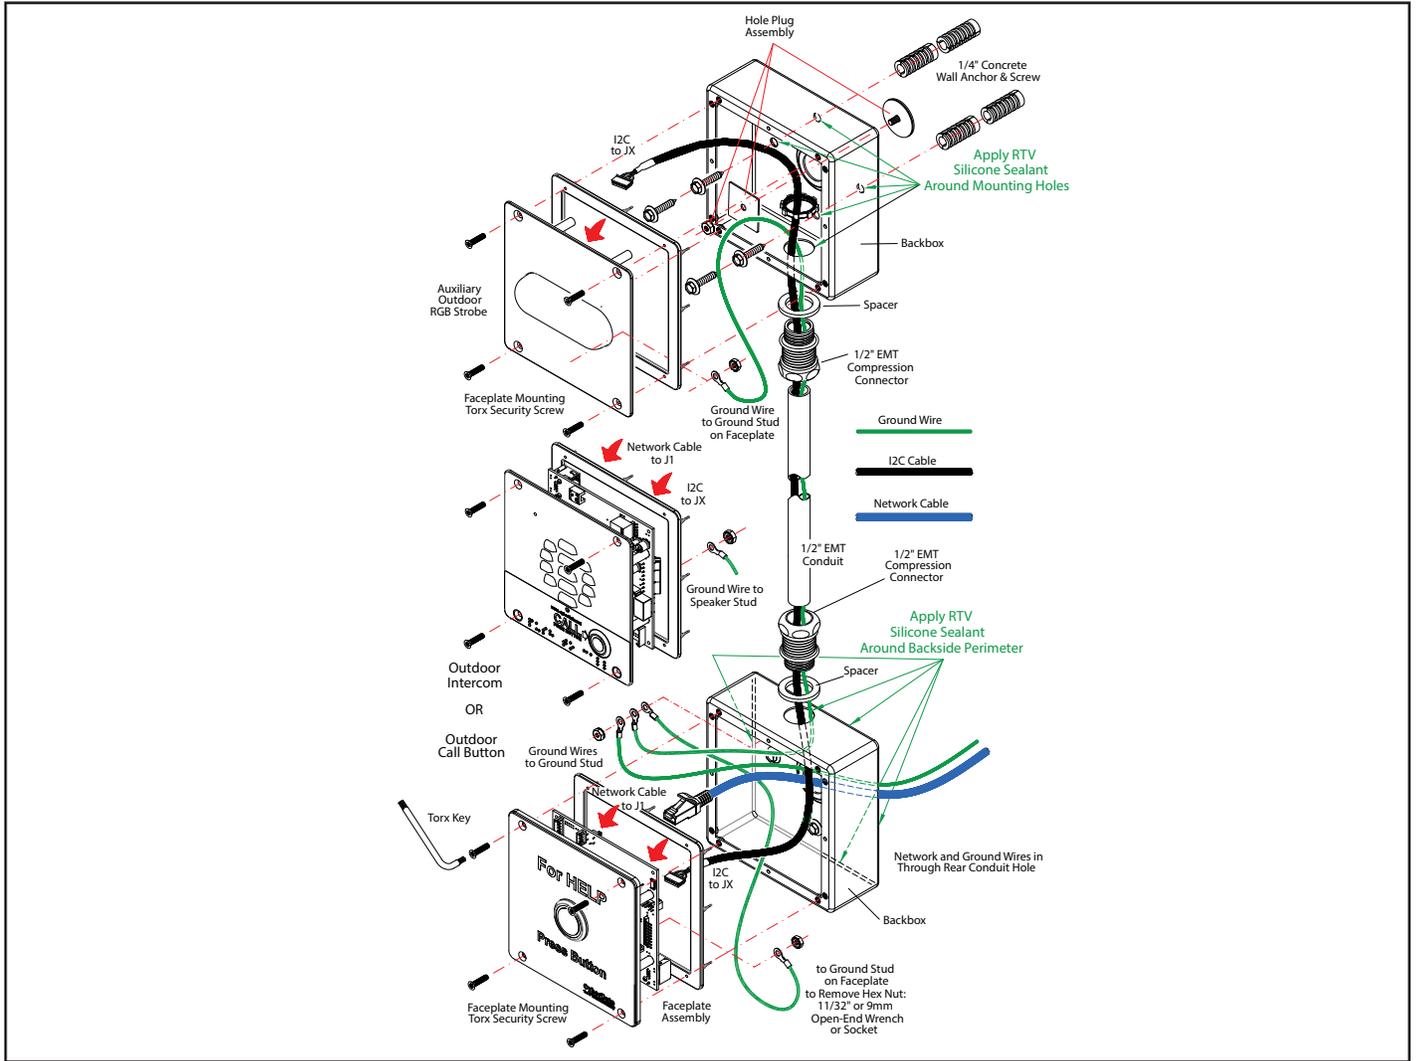

Related Products:



011491 SIP Outdoor Call Button



011214 SIP Outdoor Intercom with Keypad



011443 Flush Mount Kit, 1X



011410 SIP h.264 Video Outdoor Intercom