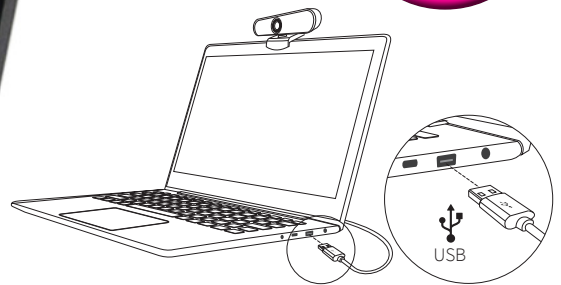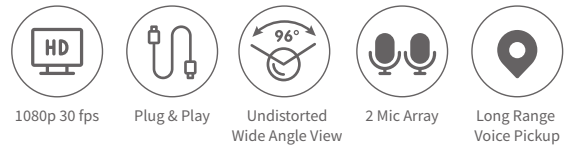# 1080p HD Webcam



**Office & Work at Home Solution**

## VISION+

The JPL Vision+ is a compact USB webcam with built-in dual stereo microphones and full HD glass lens. The webcam has a hinged bracket so it can be placed above your computer to allow long distance face to face meetings from your conference room or home office.

Compatible with all major softphones.

| | | | | |
|---|---|---|---|---|
| **HD** | | 96° | | |
| 1080p 30 fps | Plug & Play | Undistorted Wide Angle View | 2 Mic Array | Long Range Voice Pickup |

## Overview

| Features | 1080p HD 30fps CMOS Camera |
|---|---|
| | Plug & Play solution - No software downloads needed |
| | Ideal Office and Work at Home solution |
| | Two microphones - Built in dual stereo |
| | Full HD glass lens - No optical distortion |
| | 96° Wide angle field of view |
| | Full Duplex communication mode |
| | Privacy Lens Cover included |
| | USB-A connectivity |
| | USB-A to USB-C cable included |
| | Desk mount, monitor mount or tripod option |
| | AEC – Automatic Echo Cancellation |
| | ANS – Automatic Noise Suppression |
| Certifications | FCC, CE, RoHS, REACH |
| Dimensions | 127.7 x 55.3 x 50mm |
| Warranty | 24 Month repair or replacement warranty |
| MOQ | Master Shipping Carton: 20 |
| SKU: | 575-335-001 |
| EAN: | 5060126958208 |

## Technical Data

**Camera parameters:**

| | |
|---|---|
| Total Pixels | 2 million pixels |
| Lens size | 1/2.9 inch |
| Aperture | 2.5±5% |
| Image area | 5.85mm x 3.27mm |
| Maximum effective pixel | 1920 (H) x 1080 (V) 2.0 million pixels |
| Output image format | MJPG and YUY2 |
| Field of view | 96°(W) |
| AIC | Automatic Exposure (AE) |
| | Auto White Balance (AWB) |
| | Dynamic Black Level Calibration (ABLC) |
| Resolution | 1920 x 1080 @ 30fps |
| | 1280 x 720 @ 30fps |
| | 640 x 480 @ 30fps |

**Microphone parameters:**

| | |
|---|---|
| SNR | ≥60dB |
| Sensitivity | -42±3dB(0dB=1V/pa,1KHz) |
| Far-field distance | 0~2 meters |
| Horizontal voice pickup | Horizontal 180° |
| Communication mode | Full Duplex |
| AIC | Automatic gain control |
| | Automatic noise reduction control |
| | Automatic echo noise reduction control |

**Other parameters:**

| | |
|---|---|
| Interface type | Type C |
| Voltage | 5V/2A |
| OS Support | Win 2000/XP/Vista/Win 7/Win 8/Win 10 |
| | Linux with UVC (above Linux - 2.6.26) |
| | Mac - OS X 10.4.8 or later |
| | Win CE with UVC |
| | Android 4.0 or above with UVC |
| Size | 127.7 x 55.3 x 50mm |
| Weight | 100g |