

SIP-enabled h.264 Video Outdoor Intercom **CyberData**

The IP Endpoint Company

The CyberData SIP-enabled h.264 Video Outdoor Intercom is perfect for secure access settings requiring video and two-way communication.

With excellent color and low light capability, the CyberData SIP-enabled h.264 Video intercom can increase the security of any VoIP installation.

The Weather Shroud can be purchased separately for even greater weather protection.

Based on one of our most popular devices, the new Video Outdoor Intercom can be installed in nursing care facilities, schools and universities, daycare facilities, retail establishments, highway tolls, needing color video and clear two way audio.

Features

- PoE 802.3af enabled (Powered-over-Ethernet)
- SIP compliant
- Adjustable camera angle
- Full-duplex voice operation
- Supports SRST (Survivable Remote Site Telephony) in a Cisco environment
- Network web management
- Network adjustable speaker volume and microphone sensitivity
- Network downloadable firmware
- Doubles as a paging speaker
- Dry relay contact for auxiliary control (controls external power)
- Door closure and tamper alert signal
- Optional Weather Shroud for even greater weather protection
- IP65 rated enclosure
- Conformal coated PCBA
- Optional Security Torx screws with driver kit
- Downloadable alert, ringtones and callout messages

The following products are also available:



SIP Indoor Intercom
#011211



SIP Emergency Intercom
#011209



SIP Outdoor Intercom
#011186



SIP-enabled h.264 Video
Outdoor Intercom w/ Keypad
#011414



*Shown with the 011188 Weather Shroud (sold separately)




Specifications

Ethernet I/F	10/100 Mbps
Protocol	SIP RFC 3261 Compatible
Power Input	PoE 802.3af compliant or +8 to +12VDC @ 100mA Regulated Power Supply
Speaker Output	2 Watts Peak Power
On-Board Relay	1A at 30 VDC
Operating Range	Temperature: -40°C to 55°C (-40° F to 131° F) Humidity: 5-95%, non-condensing
Storage Temperature Storage Altitude	Temperature: -40° C to 70° C (-40° F to 158° F) Up to 15,000 ft. (4573 m)
IP Rating	IP65
Audio Payload Types	G711, A-law and μ-law
Video Codec	H.264 Baseline
Camera Resolution	320 x 240
SIP Video Payload	Baseline profile @ 320x240
Video Lens Angle	72 degrees
Dimensions	5.118 inches [130 mm] Length 2.252 inches [57.21 mm] Width 5.118 inches [130 mm] Height
Weight Boxed Weight	2.0 lbs. (0.90 kg) 3.0 lbs. (1.36 kg)
Warranty	2 years limited
Part Number	011410 011188 Weather Shroud (sold separately)

Note: Electronics are conformal coated for environmental protection.

CyberData
The IP Endpoint Company

SIP-enabled h.264 Video Outdoor Intercom

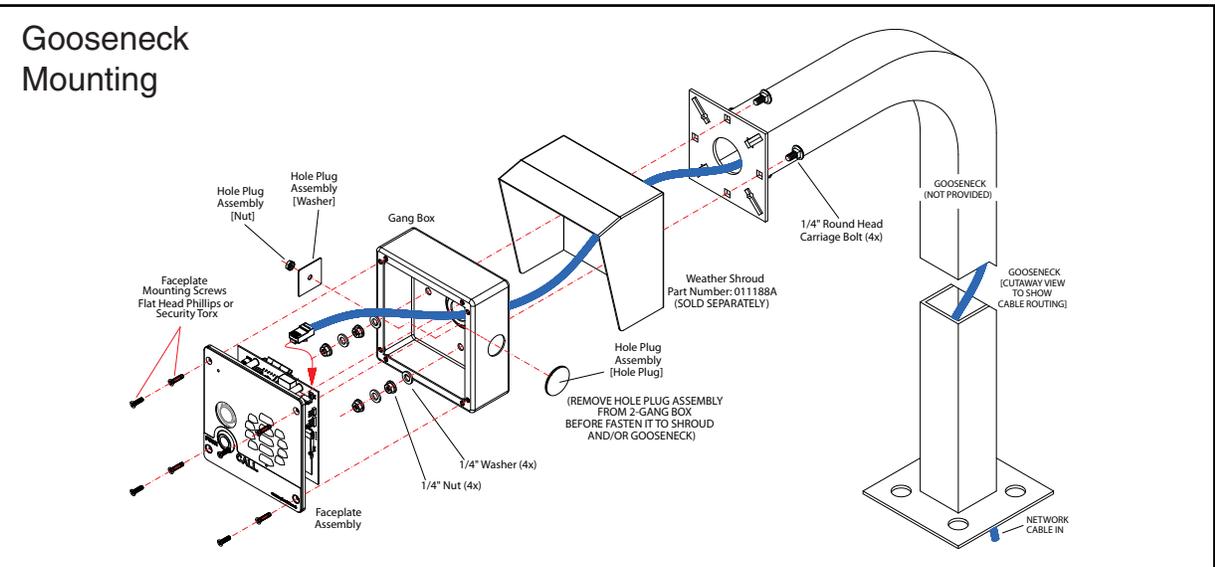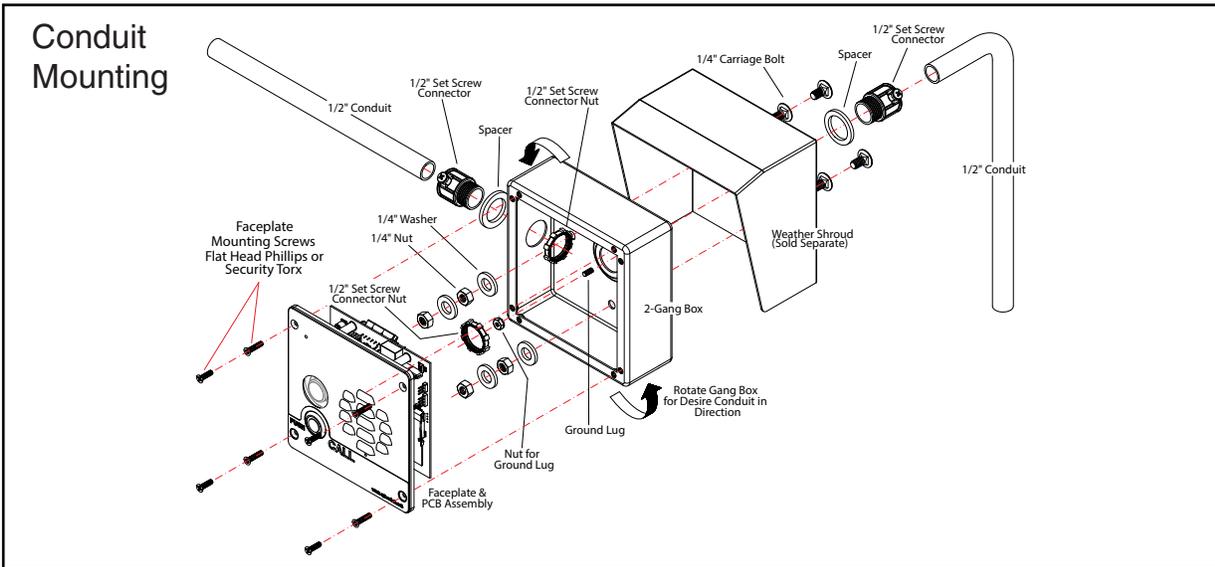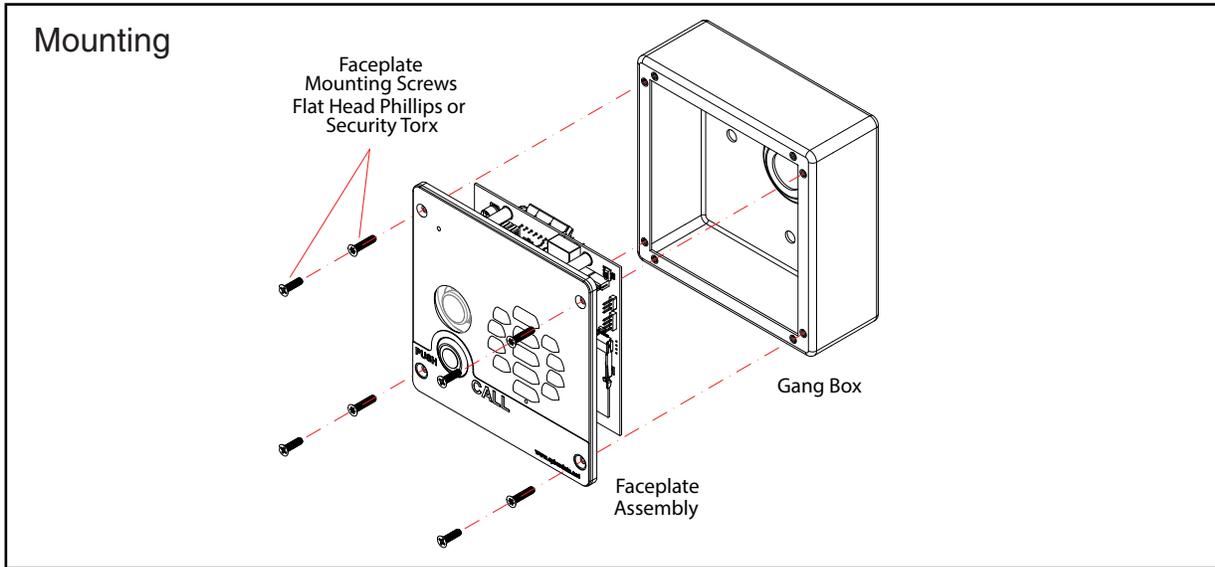

SIP-enabled h.264 Video Outdoor Intercom

