

## Call list

1. View call history list on webpage.

## Phonebook

1. Add speed dial contacts on webpage.

## Speed dial

1. Configure speed dial on webpage (Number keys 0-9).
2. Long press the corresponding number key to achieve speed dial.

## Redial

1. Press **Ⓞ**, redial a call number.


## Do not disturb

1. Enable the device do not disturb mode on webpage.

# Fanvil

## V2.2

## Packaging list

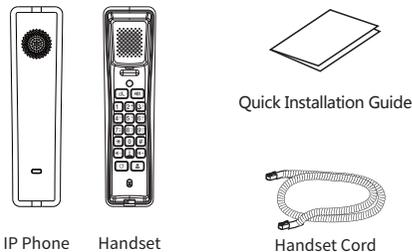

## Keys features



**Hold key**, Hold/Resume the call



**Hands-free key**  
Activate/deactivate hands free



**Mute key**, with red color LED  
In idle mode: ringer off  
In communication mode:  
mute/un-mute a call



**Volume +/- key**  
In idle mode or during ringing:  
increase or decrease ringer volume  
In communication: increase or  
decrease earpiece, headset or  
hands-free volume



**Status indicator**  
with two-color LED



**Redial key**, Access to  
redial the last record



**DSS Key**, It can be set as  
function key/speed dial  
key, etc.




## H2U

## Quick Installation Guide

## Installation the device

### • Wall mounting ( without screws and screw anchors )


- 1) Drill two holes in the wall, the vertical distance between the two holes is 136.2 or 161.2mm;
- 2) Drive in 2 screw anchors and screws in turn;  
Note : 5mm is reserved between the screw cap and the wall for easy installation of the phone base.
- 3) Connect the Ethernet cord, handset cord and power;
- 4) Align the wall mounting holes on the base with the screws made in step 2, slide down to complete the installation.



### • Connecting to the Device

Please connect power adapter, network and handset to the corresponding ports as described in below picture.

- ① Power port: connect the power adapter;
- ② Network port: connecting local area network or internet;
- ③ Handset port: connect IP Phone handset.

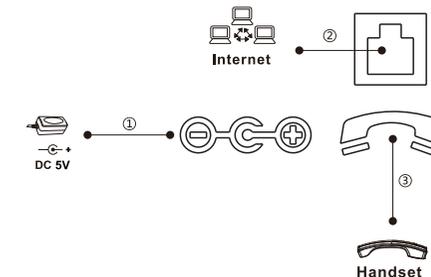

## Configuration

### Configuration via Web

1. Get the IP : Long press **#** key, the IP Phone will report the IP address by itself.
2. Login: Input the IP address in the web browser. The PC and phone should be in the same IP address segment(The default username and password are both 'admin' )
3. Configure: Select network/Account, etc. and fill the relevant content.
4. Save the configuration.

## Making a call

1. **Direct dialing**: lift the handset and enter the phone number,press **#** key .
2. **Hands-free**: enter phone number press **#** key and press **📞** or vice versa.

## Accepting a call

1. **With the handset**: pick up the handset.
2. **With the hands-free**: press **📞** .

## Putting a call on hold/resume

1. Press **📞** key, caller is put on hold.
2. Press again to **📞** key , resume the call.

## Call Mute

1. Press **🔇** to Mute the microphone during the call.
2. Press **🔇** again to un-mute the conversation.

Fanvil Technology Co., Ltd

Website: www.fanvil.com  
EMail: sales@fanvil.com support@fanvil.com  
Tel: +86-755-2640-2199 Fax: +86-755-2640-2618  
Add: 4F, Block A, Building 1#, GaoXinQi Hi-Tech Park  
(Phase-II), 67th District, Bao'An, Shenzhen, China

Fanvil Technology Co., Ltd  
www.fanvil.com

P/N:CJBA100111D0